
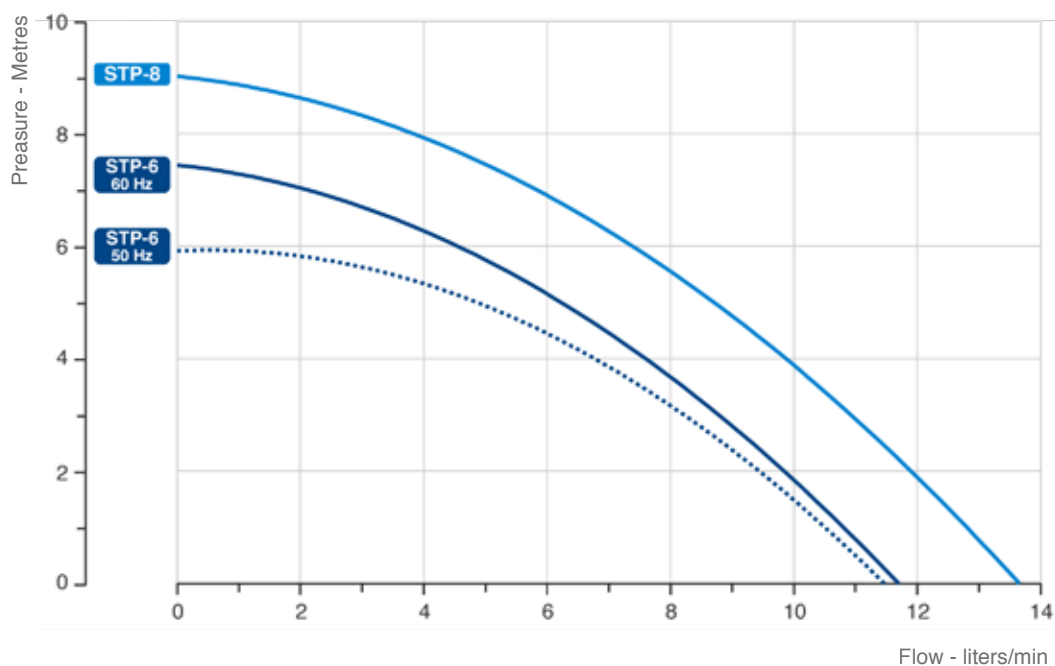
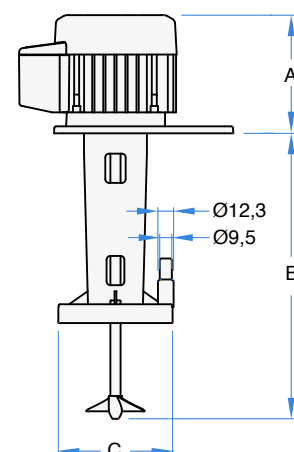



STP agitator-pumps series is designed for medium and big refrigerators characterized by high agitation.

- Pump** AGITATOR-PUMP with immersed vertical axis.
- Windings** Single-phase motor with Class F.
- Motor body** Casing in extruded aluminium.
- Protection** IP44 degree of protection from liquids seepage.
- Safety** Built-in thermal motor protection system.
- Ball bearings** Ø 8mm NSK, SKF or equivalent, in semi-rigid noise-insulated silicone casing.
- Motor shaft** AISI 303 INOX steel Ø 8mm.
- Fastening parts** INOX steel or anti-oxidant materials.
- Motor parts** Thermoplastic motor parts resistant to high temperature.
- Cooling system** Air cooled pump with a suction speed of 2,2 metre/second.
- Water connection** Compatible with John Guest fittings.
- Operation** Power supply 220 & 230 Volts - 24 hours a day non stop.
- Regulations** Complying with EN60335-2-41 and WEEE/RoHs directives.
- Note** Italian PATENTED component installed inside. Read instruction manual for correct set up and use.



REGISTERED DESIGN

TYPE	Volt	Hz	Amp	Watt (IN)	Rpm	A	B	C	Propeller Ø (mm)	Weight Kg
STP-6	230	50/60	0,28/0,35	62/71	2800/3400	90	188	78	62,5 2 Blades 15°	1,70
STP-8	230	50	0,34	82	2800	105	220	90	50 2 Blades 30°	2,00